

# FOUNTAIN SPECIALIST, INC.


226 Main Street

513-831-5717

Milford, Ohio 45150

513-831-0096 fax

[fountainspecialist.com](http://fountainspecialist.com)

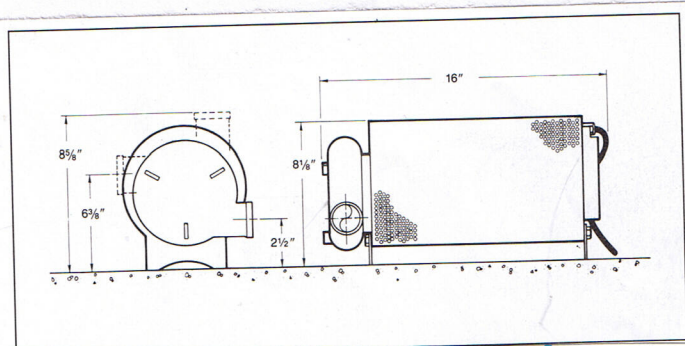

## SFU Submersible Pump

### Application

Commercially rated submersible pump designed for continuous use for fountain and waterscape operations.

### Material Specification

- Cast bronze construction.
- Stainless steel suction screen (5/64" perforations).
- Oil filled motor with diaphragm pressure equalizer.
- Stainless steel fasteners.
- Automatic thermal overload and current overload protection.
- Permanent split capacitor type (starting device not required). 10 ft. ST 16-3 submersible cord. U.L. listed.

MODEL NO.	HP	VOLT (Kw)	PH	RPM (Nom)	NEMA START CODE	FULL LOAD AMPS	CORD SIZE	CORD TYPE	WINDING RESISTANCE MAIN/START
SFU 31,	1/3	115	1	3450	J	8.0	16/3	SOW	2.26 20.34
SFU 51,	1/2	115	1	3450	E	9.5	16/3	SOW	1.54 16.21
SFU 71,	3/4	115	1	3450	D	12.0	16/3	SOW	0.99 16.17
SFU 102	1	230	1	3450	E	7.0	16/3	SOW	2.81 15.04

